



Raised access floors

BARE PANELS

**CALCIUM
SULPHATE PANELS**

TONGUE & GROOVE



PANELS


CALCIUM SULPHATE PANELS

TONGUE & GROOVE

calcium sulphate high density 600 x 600 mm

galvanized steel 0.5 mm

covering: PVC rubber, linoleum, carpet, ceramic tiles, marble, granite, parquet.

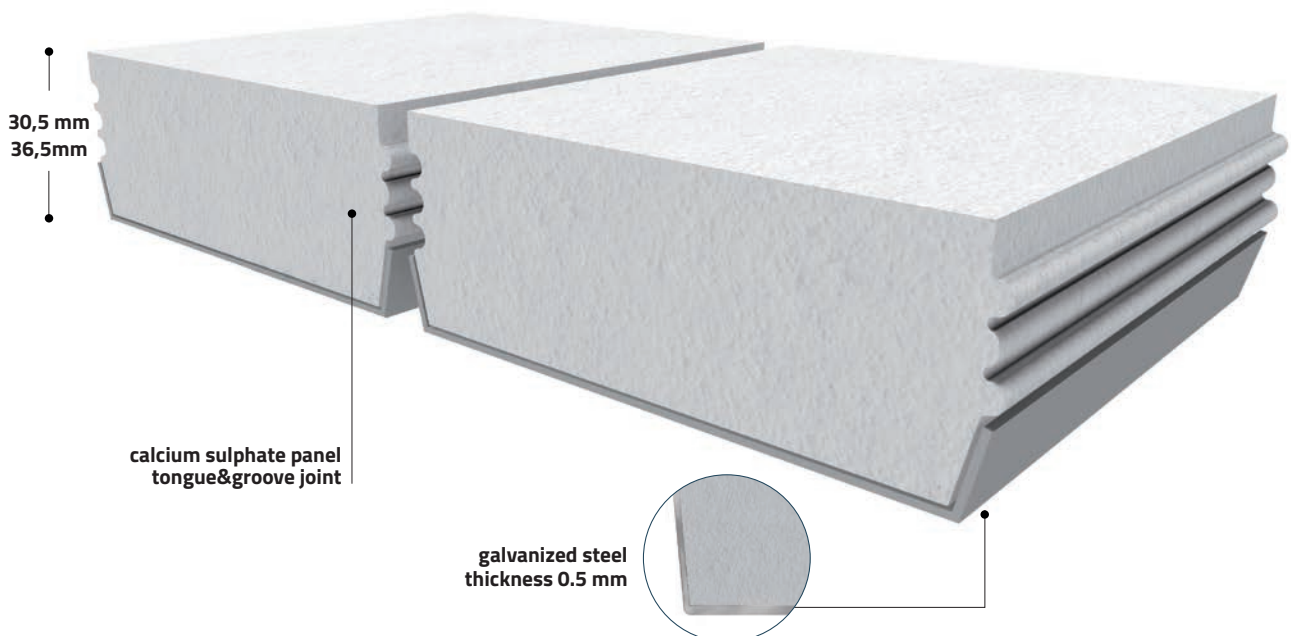


| TECHNICAL SPECIFICATIONS | CBI30TG h 30,5 mm / kg 14,50 | CBI36TG h 36,5 mm / kg 17,00 |
|--|-------------------------------------|---------------------------------|
| fire reaction UNI EN 13501-1 | A1 | |
| fire resistance UNI EN 13501-2 | > REI 60 < | |
| TECHNICAL FEATURES UNI EN 12825 | | |
| CBI/ST | center of panel - deflection 2,5 mm | 4,7 > 5,6 kn |
| | center of panel - ultimate load | 9,7 > 11,2 kn |
| | loading class | 4 > 5 |
| CBI/CR | center of panel - deflection 2,5 mm | 4,8 > 5,9 kn |
| | center of panel - ultimate load | 9,8 > 11,8 kn |
| | loading class | 4 > 5 |
| IF tubolar | center of panel - deflection 2,5 mm | 5,2 > 6,2 kn |
| | center of panel - ultimate load | 10,7 > 12,3 kn |
| | loading class | 5 > 6 |

The load resistance tests have been performed in CBI Europe's internal laboratory and simulate the test method indicated by UNI EN 12825: 2001. The results obtained at a height of 20 cm may vary depending on the installation and the general conditions of the site. If the project requires a certification from a third party this must be explicitly requested.


STRUCTURES

FLOOR SYSTEM **CBI/ST** without stringers

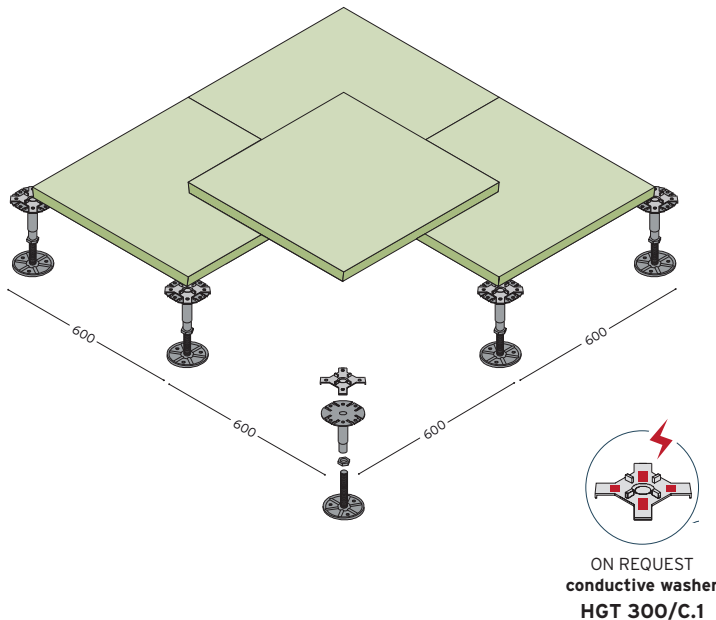


adjustable pedestal

CBI F12




| code | height/mm | weight/pcs |
|-----------------|-----------|------------|
| CBI03F12 | 45/65 | 0,23 Kg |
| CBI04F12 | 61/90 | 0,24 Kg |
| CBI05F12 | 83/130 | 0,27 Kg |
| CBI06F12 | 120/200 | 0,30 Kg |

CBI F16




| code | height/mm | weight/pcs |
|-----------------|-----------|------------|
| CBI03F16 | 45/65 | 0,30 Kg |
| CBI04F16 | 61/90 | 0,34 Kg |
| CBI05F16 | 83/130 | 0,39 Kg |
| CBI06F16 | 120/200 | 0,45 Kg |
| CBI07F16 | 170/290 | 0,55 Kg |


FLOOR SYSTEM **CBI/ST** with stringers

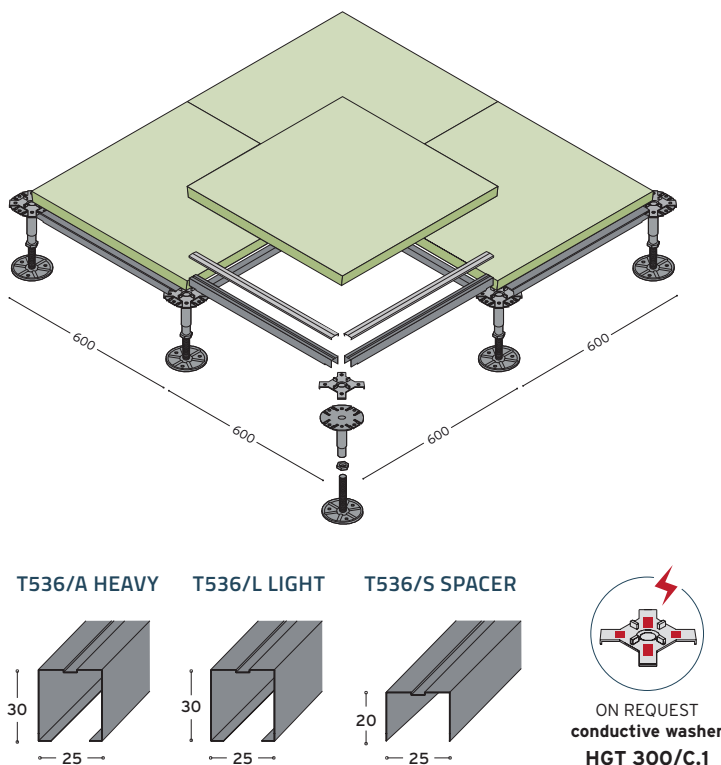


T536/A HEAVY



T536/L LIGHT




T536/S SPACER




adjustable pedestal

CBI F12



| code | height/mm | weight/pcs |
|-----------------|-----------|------------|
| CBI03F12 | 45/65 | 0,23 Kg |
| CBI04F12 | 61/90 | 0,24 Kg |
| CBI05F12 | 83/130 | 0,27 Kg |
| CBI06F12 | 120/200 | 0,30 Kg |

CBI F16



| | | |
|-----------------|---------|---------|
| CBI03F16 | 45/65 | 0,30 Kg |
| CBI04F16 | 61/90 | 0,34 Kg |
| CBI05F16 | 83/130 | 0,39 Kg |
| CBI06F16 | 120/200 | 0,45 Kg |
| CBI07F16 | 170/290 | 0,55 Kg |
| CBI08F16 | 250/390 | 0,70 Kg |
| CBI09F16 | 350/490 | 0,83 Kg |
| CBI10F16 | 450/650 | 1,00 Kg |


stringers

open section stringer made with galvanised steel, Clip-On System with PVC washer.

T536/A 30 x 25 x 1 mm
T536/L 30 x 25 x 0,7 mm
T536/S 20 x 25 x 0,7 mm

STRUCTURES




FLOOR SYSTEM CR

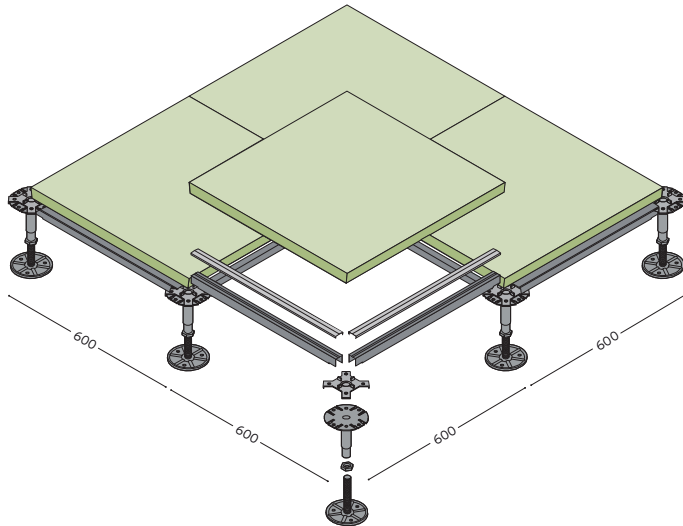

T536/A HEAVY

T536/L LIGHT


TT535



ON REQUEST
conductive washer
HGT 300/C.1

adjustable pedestal

CR




| code | height/mm | weight/pcs |
|----------------|-----------|------------|
| CR00F16 | 120/200 | 0,55 Kg |
| CR01F16 | 200/350 | 0,68 Kg |
| CR02F16 | 350/550 | 0,94 Kg |
| CR03F18 | 550/800 | 1,34 Kg |
| CR04F20 | 800/1050 | 1,85 Kg |
| CR05F20 | 1050/1300 | 2,14 Kg |

stringers


open section stringer made with galvanised steel,
Clip-On / Screw Down System with PVC washer.

T536/A 30 x 25 x thk sp. 1 mm
T536/L 30 x 25 x thk sp. 0,7 mm
TT535 20 x 30 x thk sp. 0,8 mm

FLOOR SYSTEM IF

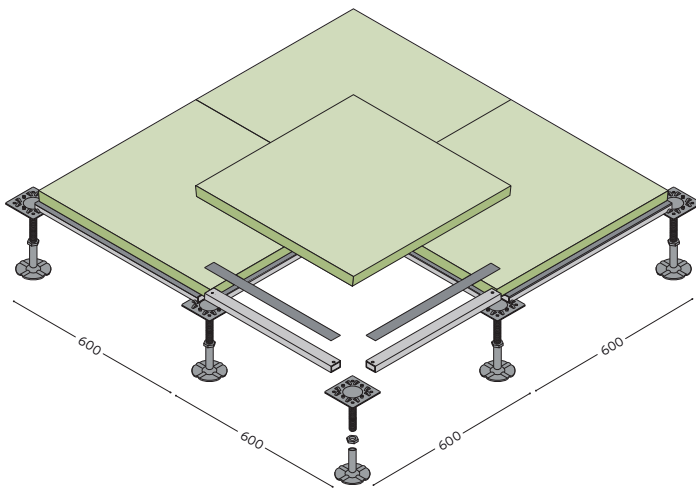


TT535



adjustable pedestal

IF



| code | height/mm | weight/pcs |
|---------------|-----------|------------|
| IF1622 | 160/220 | 0,70 Kg |
| IF2128 | 210/280 | 0,75 Kg |
| IF2734 | 270/340 | 0,80 Kg |
| IF3339 | 330/390 | 0,85 Kg |
| IF3844 | 380/440 | 0,90 Kg |
| IF4349 | 430/490 | 0,95 Kg |
| IF4854 | 480/540 | 1,00 Kg |
| IF5359 | 530/590 | 1,05 Kg |
| IF5873 | 580/730 | 1,25 Kg |
| IF7287 | 720/870 | 1,40 Kg |
| IF8699 | 860/990 | 1,70 Kg |


stringers

open section stringer made with galvanised steel,
Screw Down System with PVC washer.


TT536 20 x 30 x thk sp. 1 mm

ACCESSORIES


RAMPS AND CONNECTION STEPS



R/RAC
*mdf, connection step with anti-slip black rubber



G/Gan
*mdf, connection step with anti-slip black rubber



extruded aluminium molding

A/ALL

● 436 grey

vertical upstand


FTN/12

○ 422 white ● 436 grey


● 421 black

*other ramp finishes available on request: HPL, PVC, linoleum

PERFORATED PANEL



AF1
AF2
perforated panel for ventilation



600 x 600 mm


AF1

holes \varnothing 8 mm $S=1.45$ dm² -20%
holes \varnothing 10 mm $S=2.26$ dm² -15%


AF2

holes \varnothing 8 mm $S=2.72$ dm² -20%
holes \varnothing 10 mm $S=4.27$ dm² -15%

ALUMINIUM VENTILATION GRID



GRS/150
GRS/300
GRS/600
aluminium ventilation grid with dumper for air regulation




GRS/150 600 x 150 mm


GRS/300 600 x 300 mm

GRS/600 600 x 600 mm

ELECTRICAL OUTLET BOX




TS/8
electrical outlet box



TS/8

electrical outlet box, 8 partitions
> available on request 16 modules version

PERIMETRAL GASKET FOR FIXING



X105
*perimetral gasket for fixing




X105/30 5x30 mm lenght 28 ml/rool

X105/40 5x40 mm lenght 28 ml/rool


*one-component polyuretane based foam available on request instead of the perimetral seal

SKIRTING




BT/PVC
perimeter skirting

○ 422 white ● 436 grey
● 421 black




BT/PVC 60/80 x 5 x 3000 mm

SELF-ADHESIVE ALUMINIUM




SA/ALL
SA/ALL.1
self-adhesive aluminium tape
euro class A1 incombustible



SA/ALL/30 30 x length 50 ml/roll
SA/ALL/40 40 x length 50 ml/roll

MODULARITY

panel



The standard
600 x 600 mm
format effectively
optimises usage.

incidence

| surface | panel | pedestal | stringer |
|---------|-------|-----------|-----------|
| 25 mq | 3,3 | 4,0 pz/mq | 7,2 pz/mq |
| 50 mq | 3,3 | 3,5 pz/mq | 6,4 pz/mq |
| 100 mq | 3,3 | 3,3 pz/mq | 6,2 pz/mq |
| 200 mq | 3,3 | 3,2 pz/mq | 6,1 pz/mq |
| 400 mq | 3,3 | 3,2 pz/mq | 5,9 pz/mq |
| 1000 mq | 3,3 | 2,8 pz/mq | 5,6 pz/mq |

The average incidence is theoretic. It changes according to the dimension and shape of the space.

PACKAGING

pedestal

| CBIF12 | height | | CBIF16 | height | | CR | height | |
|-----------------|------------|-----------|------------------|------------|-----------|----------------|--------------|-----------|
| | | | CBIO1F16 | 26/35 mm | 80 | CR00F16 | 120/200 mm | 50 |
| | | | CBIO2F16 | 32/48 mm | 80 | CR01F16 | 200/350 mm | 30 |
| CBIO3F12 | 45/65 mm | 75 | CBIO3F16 | 45/65 mm | 75 | CR02F16 | 350/550 mm | 30 |
| CBIO4F12 | 61/90 mm | 60 | CBIO4F16 | 61/90 mm | 60 | CR03F18 | 550/800 mm | 15 |
| CBIO5F12 | 83/130 mm | 55 | CBIO5F16 | 83/130 mm | 55 | CR04F20 | 800/1050 mm | 15 |
| CBIO6F12 | 120/200 mm | 50 | CBIO6F16 | 120/200 mm | 50 | CR05F20 | 1050/1300 mm | 10 |
| CBIO7F12 | 170/290 mm | 40 | CBIO7F16 | 170/290 mm | 40 | | | |
| | | | CBIO8F16 | 250/390 mm | 30 | | | |
| | | | CBIO9F16 | 350/490 mm | 20 | | | |
| | | | CBIO10F16 | 450/650 mm | 20 | | | |


Pedestal for the IF / IF Plus system are sold individually.

RAISED ACCESS FLOORS: versatile, functional, 100% made in Italy.

CBI Europe is a leading manufacturer of raised access floors, with an output of over a 5 million square metres a year. Thirty years of development and the experience gained from installations in 70 different countries around the world ensure that CBI Europe's raised floor systems solve all the

problems normally caused by incompatibility between architectural restrictions and the perpetual changes demanded by evolving technology.

CBI Europe's floors also create environments with a high level of sustainability and livability.

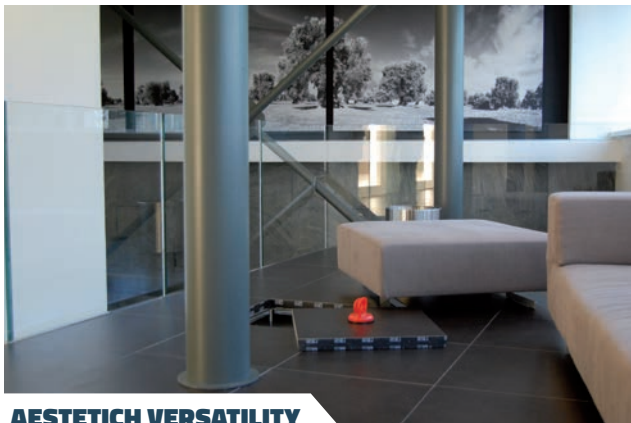

AESTETICH VERSATILITY



LIMITLESS CONFIGURATION



HI-TECH PERFORMANCES

Why

**VERSATILE, HIGH-TECH, SUSTAINABLE,
EASY TO INSTALL AND INSPECT:
THE PERFECT SOLUTION FOR ALL
TYPES OF STRUCTURAL AND DESIGN
REQUIREMENTS.**

Where

**NEW-BUILD AND REFURBISHED OFFICES,
BANKS, OPERATIONS CENTRES,
CONTROL ROOMS, HOSPITALS,
HOMES AND PUBLIC BUILDINGS.**

Benefit

- **ACHIEVING FLEXIBLE, COMFORTABLE, CONTEMPORARY AND RESPONSIBLE INTERIORS.**
- **OBTAINING POINTS FOR LEED CERTIFICATION.**
- **SOUNDPROOFED ENVIRONMENTS.**
- **SPEEDING UP CONSTRUCTION.**
- **CONTAINING COSTS OF LABOUR AND MAINTENANCE.**
- **STRUCTURES 100% INSPECTABLE.**
- **INTEGRATION WITH ADVANCED CLIMATE CONTROL, DOMOTICS AND LIGHTING.**
- **PRECISE BUDGETING.**



FIRE REACTION

All products are continually subjected to laboratory tests during the design and testing of certified institutes before sale. The Calcium Sulphate Fully Steel Encapsulated System CBI Europe is the first and only one to have obtained the highest certification of fire resistance: REI 60.



EXTENDED WORKING LIFE & DIMENSIONAL STABILITY

The excellence of the materials used and the production technologies make panels and structures resistant and lasting over time.



ACOUSTIC ABSORPTION

The high density of the materials used contributes to the absorption of sounds, increasing the comfort of the working environments. Upon request they can be supplied with certifications.



WALKING COMFORT

The flexural strength ensures an optimal response to the stresses of foot traffic. Upon request they can be supplied with certifications.



HUMIDITY RESISTANCE

Maintain their dimensional stability even under extreme ambient conditions, and can therefore be installed in environments characterised by high levels of relative humidity and large variations in temperature.



LEED CERTIFICATION

Wood agglomerate or calcium sulphate panels obtained from recyclable raw materials and manufactured in certified and constantly monitored processes to guarantee the highest standards of quality and safety. Each system contributes to obtaining points for LEED certification.



FASTNESS

Light, modular and easy to handle, the systems are designed to guarantee rapid installation, respecting all the requirements of planarity and orthogonality. The inspection of the individual panels allows a significant reduction in time and maintenance costs.



INSPECTABILITY

100% inspectable, giving easy access to water pipes and electrical cables and permitting easy reconfiguration of rooms.



CBI EUROPE Via Mons. A.O. Romero, 14 · 60027 Osimo (AN) Italy
T +39 071 71 08 688 · fax +39 071 71 08 63 · info@cbi-europe.com · www.cbi-europe.com

