

Metal ceilings


OPEN CELL system

 **CBI**
EUROPE
HI-TECH INTERIORS

base 6 h 35 OS1 OPEN CELL SYSTEM


base 9 h 40

base 9 h 45

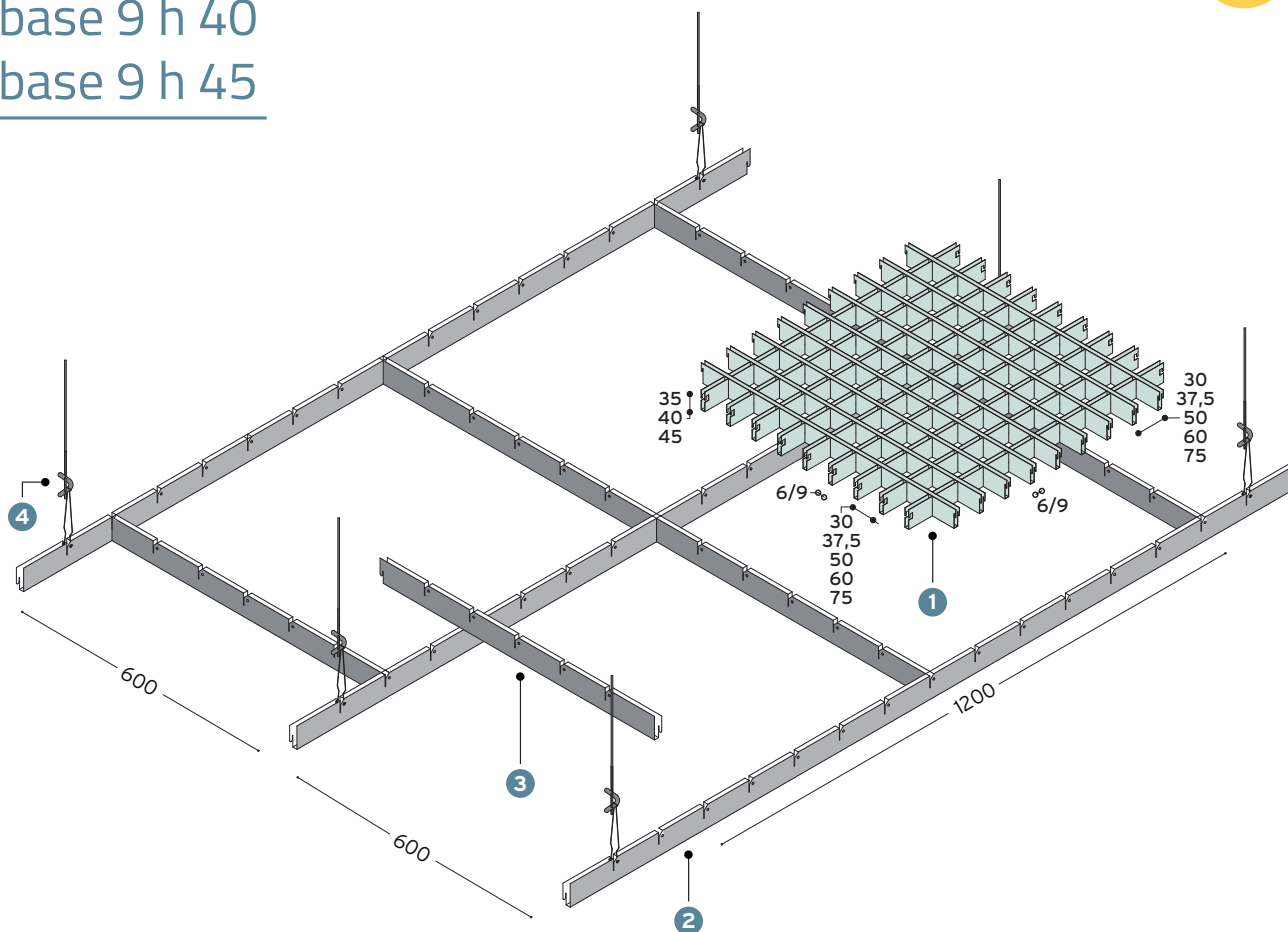

PANEL PANNELLO

600 x 600 mm



prepainted aluminium
alluminio preverniciato
thk sp. 0.4 - 0.5

BASE 6 · H 35 mm

code codice mesh maglia

OS 0501	30x30x35 mm
OS 0502	37,5x37,5x35 mm
OS 0503	50x50x35 mm
OS 0504	60x60x35 mm
OS 0505	75x75x35 mm

BASE 9 · H 40 mm

code codice mesh maglia

OS 0701	30x30x40 mm
OS 0702	37,5x37,5x40 mm
OS 0703	50x50x40 mm
OS 0704	60x60x40 mm
OS 0705	75x75x40 mm


BASE 9 · H 45 mm

code codice mesh maglia

OS 0601	30x30x45 mm
OS 0602	37,5x37,5x45 mm
OS 0603	50x50x45 mm
OS 0604	60x60x45 mm
OS 0605	75x75x45 mm

GRID SYSTEM STRUTTURA

· OS2 SYSTEM



1

panel
pannello
600x600 mm

2

OS P3000 main runner
profilo portante
6x35x3000 mm
9x40x3000 mm
9x45x3000 mm
0.56 pcs/mq

3

OS I600 cross tee
profilo intermedio
6x35x600 mm
9x40x600 mm
9x45x600 mm
2.77 pcs/mq

4

CML 00004 hanger bracket
attacco di sospensione
0.8 pcs/mq

OS 902 T closing top for grille with hole for spotlight
top di chiusura per griglia con foro per faretto
190x190x35/40/45 mm


OS 901 T closing top for multi-modular grille
top di chiusura per grigliato multimodulare
190x190x35/40/45 mm

OS 801 G BASE 6 joint for grill
OS 802 G BASE 9 giunto per grigliato
0.56 pcs/mq

base 6 h 35 **OS2 OPEN CELL SYSTEM**

base 9 h 40


base 9 h 45

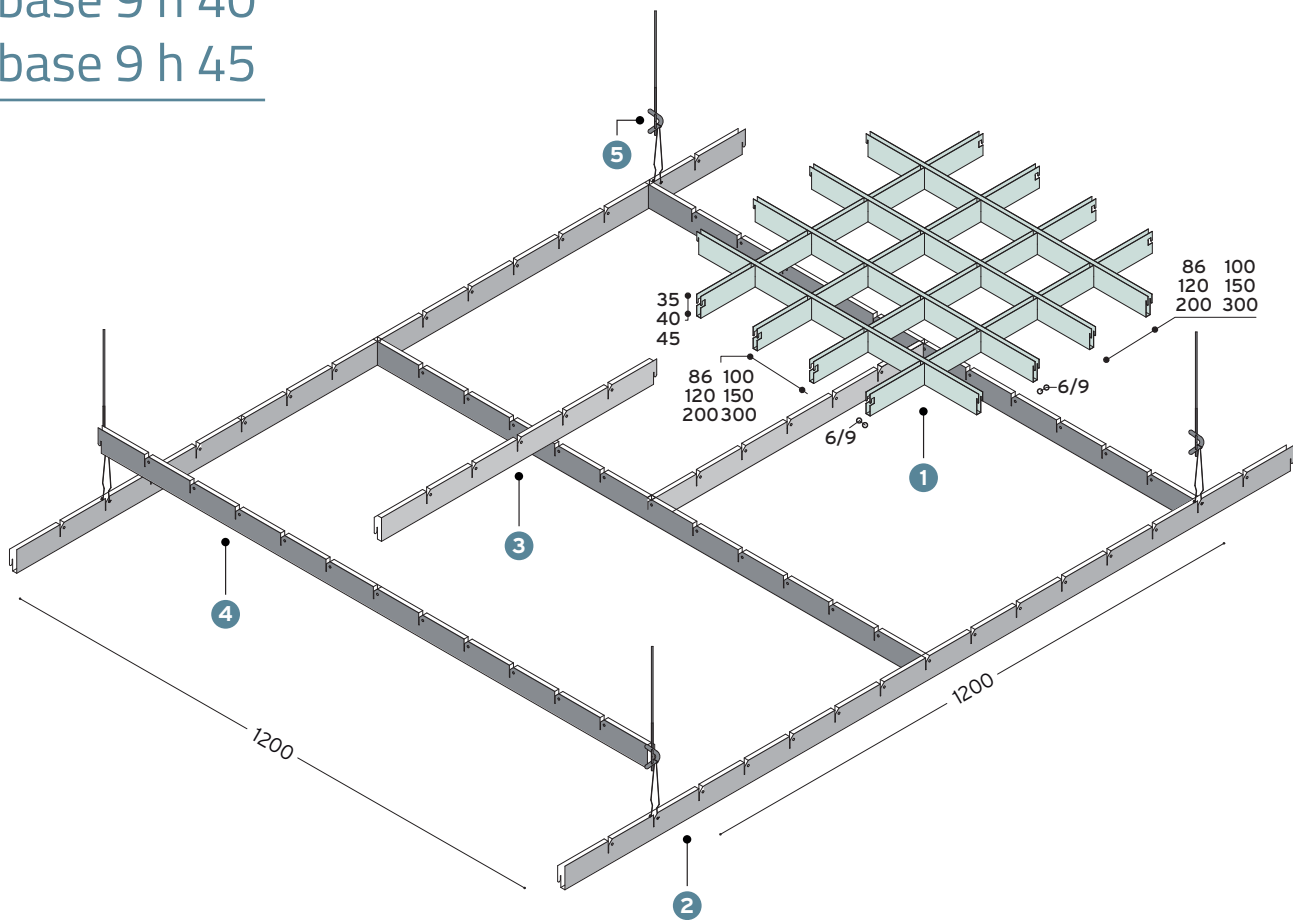

PANEL PANNELLO 600 x 600 mm	BASE 6 · H 35 mm code codice mesh maglia	BASE 9 · H 40 MM code codice mesh maglia	BASE 9 · H 45 MM code codice mesh maglia	
				code codice
<p>prepainted aluminium alluminio preverniciato thk sp. 0.4 - 0.5</p>	OS 0506	86x86x35 mm	OS 0606	86x86x45 mm
	OS 0507	100x100x35 mm	OS 0607	100x100x45 mm
	OS 0508	120x120x35 mm	OS 0608	120x120x45 mm
	OS 0509	150x150x35 mm	OS 0609	150x150x45 mm
	OS 0510	200x200x35 mm	OS 0610	200x200x45 mm
	OS 0511	300x300x35 mm	OS 0611	300x300x45 mm

GRID SYSTEM STRUTTURA

· OS2 SYSTEM

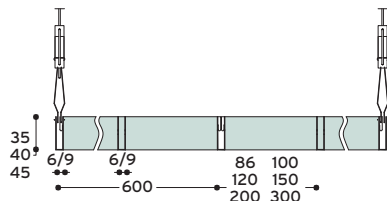


1	2	3	4	5
panel pannello 600x600 mm	OS P3000 main runner profilo portante 6x35x3000 mm 9x40x3000 mm 9x45x3000 mm 0.28 pcs/mq	OS 1600 cross tee profilo intermedio 6x35x600 mm 9x40x600 mm 9x45x600 mm 1.38 pcs/mq	OS Y1200 cross tee profilo intermedio 6x35x1200 mm 9x40x1200 mm 9x45x1200 mm 1.38 pcs/mq	CML 00004 hanger bracket attacco di sospensione 0.8 pcs/mq

OS 902 T closing top for grille with hole for spotlight top di chiusura per grigliato con foro per faretto 190x190x35/40/45 mm	OS 901 T closing top for multi-modular grille top di chiusura per grigliato multimodulare 190x190x35/40/45 mm	OS 801 G BASE 6 joint for grill OS 802 G BASE 9 giunto per grigliato 0.28 pcs/mq
---	--	--


base 25 h 60 **OS3 OPEN CELL SYSTEM**

base 25 h 80

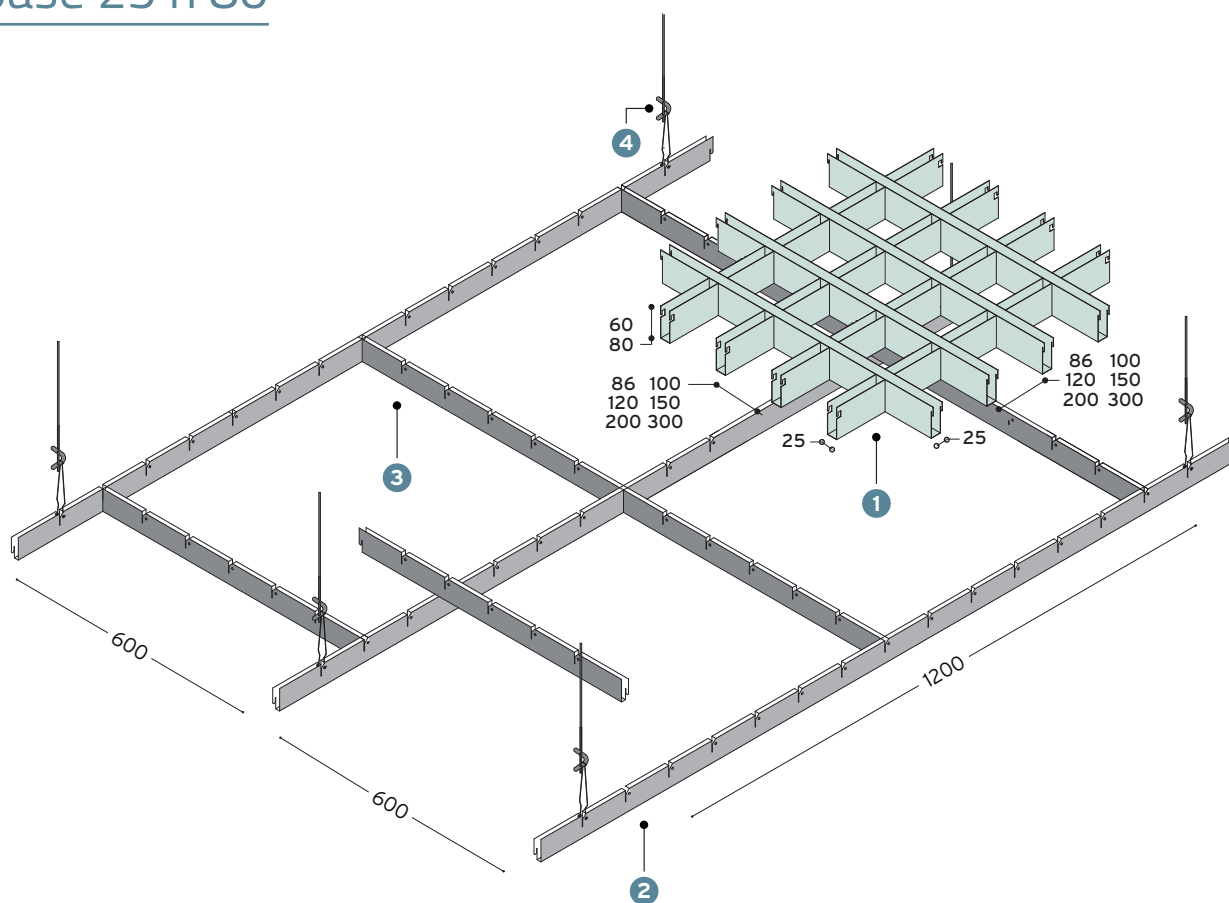

PANEL PANNELLO

600 x 600 mm



prepainted aluminium
alluminio preverniciato
thk sp. 0.5 - 0.6

BASE 25 · H 60 mm

code codice mesh maglia

OS 2001	86x86x60 mm
OS 2002	100x100x60 mm
OS 2003	120x120x60 mm
OS 2004	150x150x60 mm
OS 2005	200x200x60 mm
OS 2006	300x300x60 mm


BASE 25 · H 80 MM

code codice mesh maglia

OS 2101	86x86x80 mm
OS 2102	100x100x80 mm
OS 2103	120x120x80 mm
OS 2104	150x150x80 mm
OS 2105	200x200x80 mm
OS 2106	300x300x80 mm

GRID SYSTEM STRUTTURA

· OS3 SYSTEM

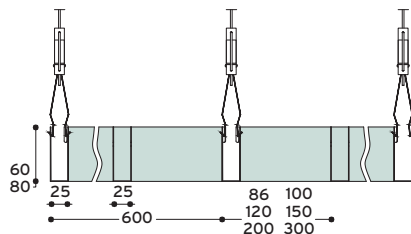

1

grille panel
pannello grigliato
600x600 mm

2

OS P1800 main runner
profilo portante
25x60x1800 mm
25x80x1800 mm
0.98 ml/mq

3

OS I600 cross tee
profilo intermedio
25x60x600 mm
25x80x600 mm
2,77 ml/mq


4

CML 00004 hanger bracket
attacco di sospensione
0.8 pcs/mq

OS 903 T closing top for grille with hole for spotlight
top di chiusura per grigliato con foro per faretto
190x190x35/40/45 mm


OS 803 G joint for grill
giunto per grigliato
0.92 pcs/mq

base 15 h 38 **OS4 OPEN CELL SYSTEM**

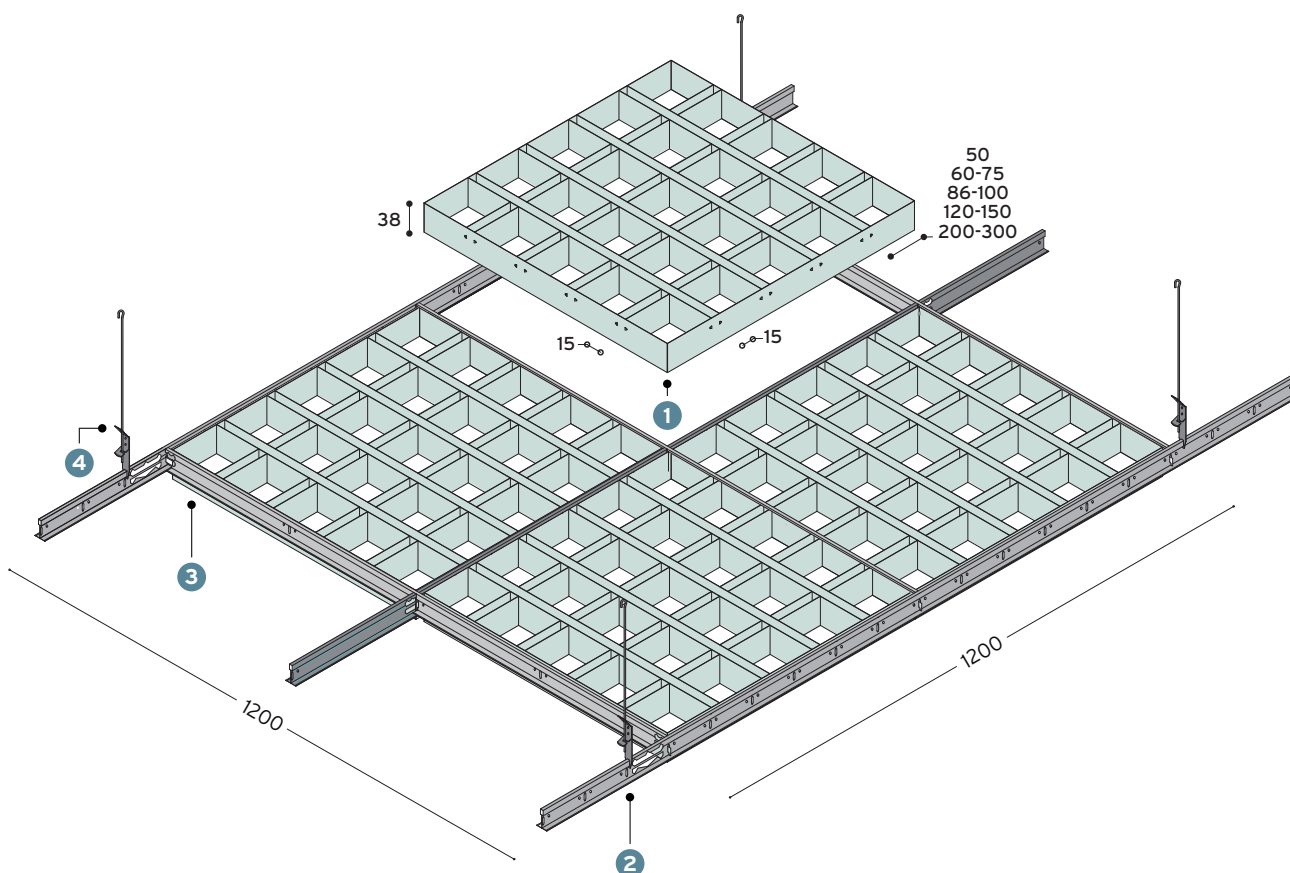

PANEL PANNELLO

600 x 600 mm



prepainted aluminium
alluminio preverniciato
thk sp. 0.4 - 0.5


BASE 15 · H 38 mm

code codice mesh maglia

OS 1501	50X50X38 mm	code codice	mesh maglia
OS 1502	60X60X38 mm	OS 1506	120X120X38 mm
OS 1503	75X75X38 mm	OS 1507	150X150X38 mm
OS 1504	86X86X38 mm	OS 1508	200X200X38 mm
OS 1505	100X100X38 mm	OS 1509	300X300X38 mm

GRID SYSTEM STRUTTURA

· T15

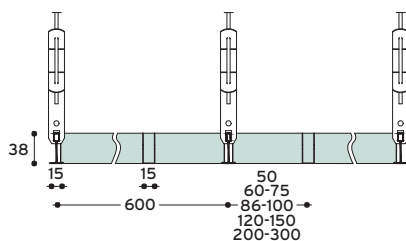


1	2	3	4	5
grille panel pannello grigliato 600x600 mm	PA 3700 main runner profilo portante 15x38x3700 mm 0.23 pcs/mq	IA 1200 cross tee profilo intermedio 15x38x1200 mm 1.40 pcs/mq	IA 0600 cross tee profilo intermedio 15x38x600 mm 1.40 pcs/mq	GM2415 hanger bracket attacco di sospensione


OS 902 T closing top for grille with hole for spotlight
top di chiusura per grigliato con foro per faretto
190x190x35/40/45 mm

OS 901 T closing top for multi-modular grille
top di chiusura per grigliato multimodulare
190x190x35/40/45 mm

base 9 h 40 OS5 OPEN CELL SYSTEM

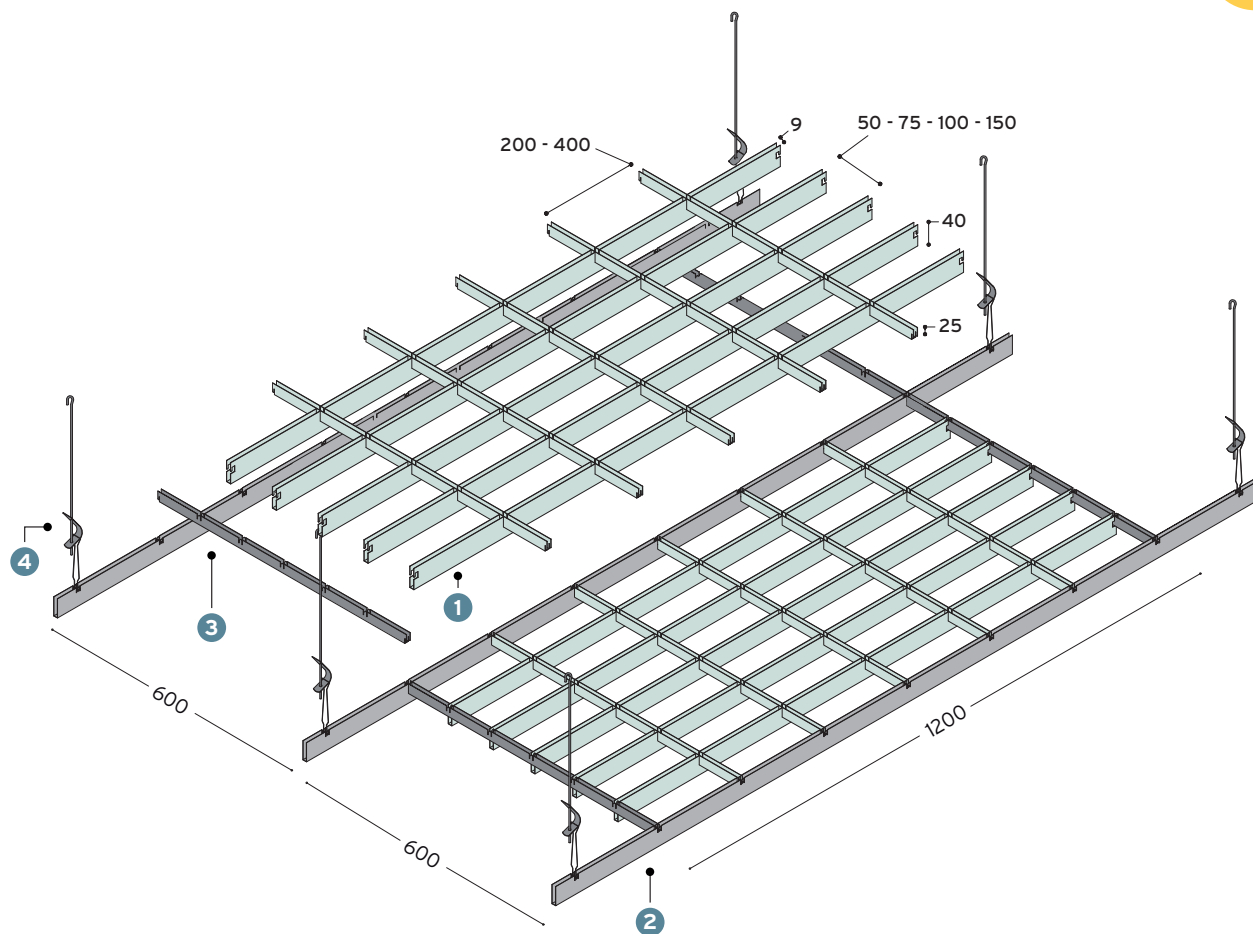

PANEL PANNELLO



50 - 75 - 100 - 150

pre-painted aluminium
alluminio preverniciato
thk sp. 0.4 - 0.5

BASE 9 · H 40 mm


code codice mesh maglia

OS0712 50x200x40 mm
OS0713 50x400x40 mm
OS0714 75x200x40 mm
OS0715 75x400x40 mm

code codice mesh maglia
OS0716 100x200x40 mm
OS0717 100x400x40 mm
OS0718 150x200x40 mm
OS0719 150x400x40 mm

GRID SYSTEM STRUTTURA

· OS5 system

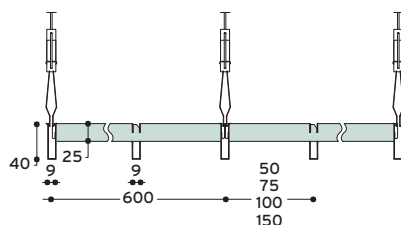

1

grille panel
pannello grigliato

2

OS P1800 main runner
profilo portante
9x40x1800 mm
0.92 ml/mq

3


OS I600 cross tee
profilo intermedio
9x25x600 mm
0.84 ml/mq

4


CML 00004 hanger bracket
attacco di sospensione
1.00 pcs/mq

OS 802G BASE 9 joint for grill
giunto per grigliato
0.92 pcs/mq


PERIMETRAL MOLDING > standard length 3000 mm




20 X 24
CP10 aluminum 0.5/0.6 mm
A3000 steel 0.5/0.6 mm




24 X 40
CP20 aluminum 0.5/0.6 mm
A3002 steel 0.5/0.6 mm




24 X 24
CP11 aluminum 0.5/0.6 mm
A3001 steel 0.5/0.6 mm




19 X 31
CP30 aluminum 0.5/0.6 mm
A3003 steel 0.5/0.6 mm




24 X 20 X 20 X 24
CW2020 aluminum 0.5/0.6 mm
W3003 steel 0.5/0.6 mm



24 X 15 X 15 X 24
CW1515 aluminum 0.5/0.6 mm
W3004 steel 0.5/0.6 mm




20 X 12 X 12 X 24
CW1210 aluminum 0.5/0.6 mm
W3000 steel 0.5/0.6 mm



25 X 8 X 15 X 15
CW0815 aluminum 0.5/0.6 mm
W3002 steel 0.5/0.6 mm

COLOURS RANGE

ALUMINIUM



white



RAL 9006
 silver



RAL 7024
 dark grey



RAL 9005
 black

ON REQUEST



ALL RAL COLOURS


The range of colours shown on this page is purely indicative, and we recommend that you request the samples. For other colours, please ask about the availability in stock.

For further details, refer to the bundle of RAL colours and CBI's exclusive colours bundle, or contact the technical department at CBI Europe.

OPEN CELL: design and functionality, 100% made in Italy.

CBI EUROPE's grilles system is the perfect solution for civil and industrial buildings. The space (technical area) that is created between the grilles and the ceiling or wall is used to accommodate the plumbing and electrical wiring, and is 100%

inspectable. Grilles are resistant, durable, fire and moisture resistant, simple and quick to install, hygienic, certified and eco-friendly. They have been designed for new generation interiors and give an extraordinary decorative effect.

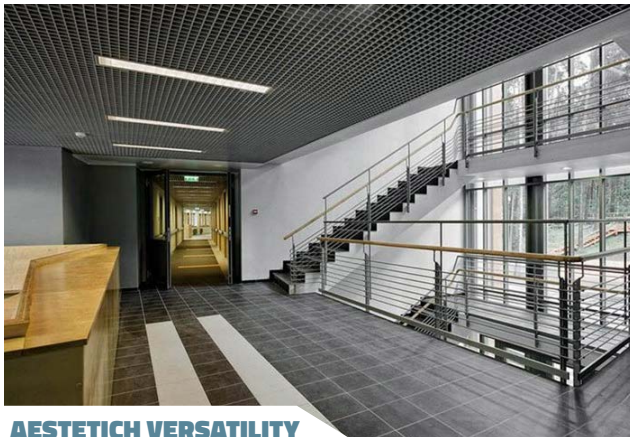

AESTETICH VERSATILITY



LIMITLESS CONFIGURATION



HI-TECH PERFORMANCES

Why

VERSATILE, FUNCTIONAL, LONG LASTING AND EASY TO INSTALL: A PERFECT COMBINATION OF TECHNOLOGY AND DESIGN THAT GUARANTEES HYGIENE AND STRENGTH.

Where

LARGE PUBLIC SPACES - HALLS, SHOPPING CENTRES, AIRPORTS, BANKS, OFFICES, CORRIDORS, HOSPITALS.

Benefit

- **ALLOWS DIFFUSED LIGHTING BY POSITIONING THE LIGHT FIXTURES IN THE PLENUM.**
- **ACHIEVING FLEXIBLE, COMFORTABLE, CONTEMPORARY AND RESPONSIBLE INTERIORS.**
- **OBTAINING POINTS FOR LEED CERTIFICATION.**
- **SOUNDPROOFED ENVIRONMENTS.**
- **SPEEDING UP CONSTRUCTION.**
- **CONTAINING COSTS OF LABOUR AND MAINTENANCE.**
- **STRUCTURES 100% INSPECTABLE.**
- **INTEGRATION WITH ADVANCED CLIMATE CONTROL, DOMOTICS AND LIGHTING.**
- **PRECISE BUDGETING.**



FIRE REACTION

Including versions incorporating sound-absorbing non-woven fabric, are non-flammable according to the Italian Ministerial Decree of the 15th march 2005, and therefore conform to Euroclass A1 fire reaction requirements (only for not perforated panels).



HYGIENE

Easy to wash and sterilise. On request, they can also be supplied in a special fungicidal and bactericidal paint finish. We recommend hermetically sealed, Down Clip 200 System Metal Ceilings for use in operating theatres and pharmaceutical industries. All other types of metal suspended ceilings are ideal for use in kitchens, canteens, hospitals and schools. They also provide valuable protection against dust in industries producing delicate electronic circuits. Tests carried out under ISO 22196 ensure the reduction of the microbial population > 95% after 24 hours.



HUMIDITY RESISTANCE

Maintain their dimensional stability even under extreme ambient conditions, and can therefore be installed in environments characterised by high levels of relative humidity and large variations in temperature. For outdoor installations, please contact CBI Europe's Technical Department.



PAINTWORK

Suspended ceilings in pre-painted aluminium and hot-galvanised and pre-painted FePO2 steel are coil-coated with primer and polyester paint to a thickness of 25 microns. Suspended ceilings in electro-galvanised and post-painted FePO2 steel are electrostatically coated with resin based, thermosetting, polyester powder paints to a thickness of 60 microns.



LIGHT REFLECTANCE

All metal suspended ceilings finished in white and unperforated > 85% have a standard gloss level of 20.



INTEGRATED ACCESSORIES

All metal suspended ceilings can be fitted with accessories such as lighting units, ventilation vents, smoke detectors, sprinklers and suspended signage.



FASTNESS

The systems are designed to guarantee rapid installation, speeding up the installation phases and respecting all the requirements of planarity and orthogonality.



ACOUSTIC ABSORPTION

Ceilings and coverings combine acoustic performance, comfort and aesthetics with adequate absorption values. Upon request they can be supplied with certifications issued by independent companies.



LEED CERTIFICATION

All products are manufactured in certified and constantly monitored processes to guarantee the highest standards of quality and safety.



ANTI-SEISMIC

The systems guarantee the application of all good safety practices in the construction and development of dedicated projects. Upon request, they can be supplied with an anti-seismic reports, which indicate suitable bracing.