

PROSUPPORT TUBE SYSTEM

BASE + SCREW + EXTENSION + MULTI-FUNCTION HEAD SELF-LEVELLING AND FIX

PROSUPPORT TUBE SYSTEM is an adjustable and modular supports system for outdoor floating floors from the height of 29 mm to 1000 mm. The system is composed of 1 base, 2 screws, 1 flange, 2 heads and several pvc pipes to obtain the requested height. Both heads, according to the screw, can be fix or self-levelling.

PATENTED

FULL SECTIONAL KIT

FULL KIT	PC./PACK. FULL KIT	BASE KIT	HEAD	FLANGE	PIPE	H (mm) min/max with self-leveling head	H (mm) min/max with fix head
PST 3454/..	40	(PSTK 0202 + PSTH 04 / 02)				34/54	29/49
PST 5474/..	40	(PSTK 0204 + PSTH 04 / 02)				54/74	49/69
PST 7494/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 35)				74/94	69/89
PST 94114/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 55)				94/114	89/109
PST 114134/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 75)				114/134	109/129
PST 134154/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 95)				134/154	129/149
PST 154174/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 115)				154/174	149/169
PST 174194/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 135)				174/194	169/189
PST 194214/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 155)				194/214	189/209

EXAMPLE: 1) FULL KIT= BASE KIT + HEAD (PST 3454/4= PSTK 0202 + PSTH 04)
2) FULL KIT= BASE KIT + HEAD + FLANGE + PIPE (PST 7494/4= PSTK 0202 + PSTH 04 + PSTGH 02 + PSTT35)



BASE KIT (base + screw without head 20-40mm)
polypropylene - pack. 40pcs (PSTK 0202) - pack. 20 pcs (PSTK 0204)

Article	thickness (mm)	kit / pack.
PSTK 0202	20	40
PSTK 0204	40	20

Items not for sale individually. Minimum order one pack.

HEAD with removable flaps 2/4 mm
polypropylene - pack. 40 pcs

Article	Flap thickness (mm)	Pcs/pack
PSTH 02	2	40
PSTH 04	4	40

Items not for sale individually. Minimum order one pack.



ANTI-NOISE AND ANTI-SLIP DISK
rubber - H 1,5 mm - Ø 150 - pack. 120 pcs

Article	H / Ø mm	Pcs/pack
PSTG	H 1,5 - Ø150	120

The non-slip rubber disk to be used with the heads of PROSUPPORT TUBE SYSTEM reduces noises till 25 dB.
Items not for sale individually. Minimum order one pack.



PIPE (OUTER DIAMETER Ø110 mm THICKNESS 4 mm)
polyethylene or polypropylene - pack. 40 pcs

Article	H (mm)	Pcs/pack
PSTT 35	35	40
PSTT 55	55	40
PSTT 75	75	40
PSTT 95	95	40
PSTT 115	115	40
PSTT 135	135	40
PSTT 155	155	40

Items not for sale individually. Minimum order one pack.



FLANGE 40 mm
polypropylene - pack. 40 pcs

Article	H (mm)	Pcs/pack
PSTGH 02	40	40

Connection nut with a lower side of 110 mm inner diameter, where the pipe of different heights should be inserted, and one side with thread where the regulation screws should be inserted.
Items not for sale individually. Minimum order one pack.


HOW TO ORDER

Heights from 29 to 74 mm


- 1A) Choose the base kit (base+screws without head) of the needed height (Ex. PSTK 0202).
- 2) Choose the code no. of the needed head (Ex. PSTH 04).
- 1B) Choose the full kit (Ex. PST 3454/4)

For heights from 74 till 155 mm

- 1A) Indicate the code of the base kit PSTK 0202.
- 2) Choose the code of the requested head. (Ex. PSTH 04).
- 3) Choose the pipe of the requested height (Ex. PSTT 55).
- 4) Choose the connection nut PSTGH 02.
- 1B) Choose the full kit (Ex. PST 7494/4)

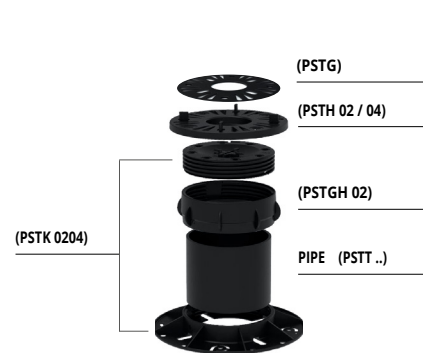


UPON REQUEST IT IS POSSIBLE TO HAVE HEIGHTS TILL 1000 MM USING PIPES FROM 155 TILL 955.
For information and installation instructions ask for the technical data sheet. Price to be agreed. Production delay 4/5 weeks.

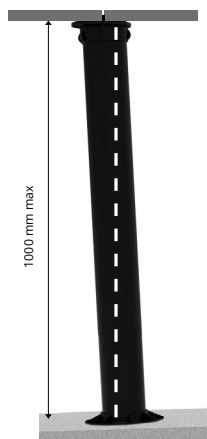

SELF-LEVELLING HEAD MODE
Max height 1000 mm
with max slope of 5%.



FIXED HEAD MODE
Max height 1000 mm

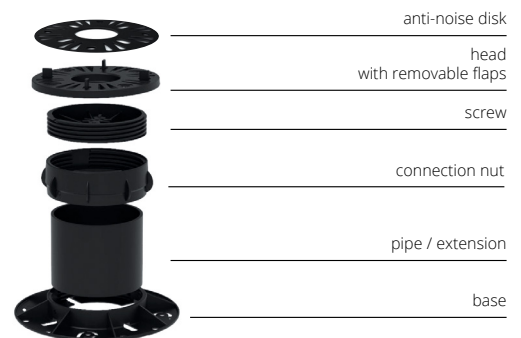




PERIMETER SPACER PROSUPPORT TUBE

PERIMETER SPACER PROSUPPORT SYSTEM
Stainless steel AISI 316L / 1.4404 - V4A - pack. 40 Pcs

Article		
---------	--	--

DPP

Perimeter spacer of stainless steel AISI 316L / 1.4404 - V4A for laying outdoor floating floors. The profile makes a 5 mm wide perimeter gap, for the outflow of rainwater; moreover, thanks to the rounded flin with which is provided, it does not damage the waterproofing sheath. The slit width of 0.5 cm and the length of 18 cm ensure a perfect anchorage of the spacer with the heads of the Prosupport System.

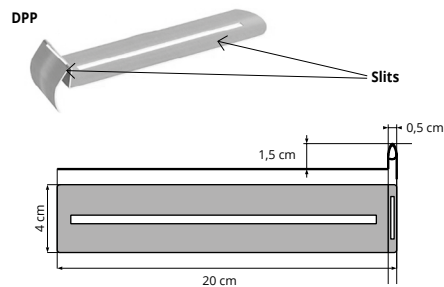

PROSUPPORT TUBE SYSTEM OPTIONAL

ADJUSTING KEY (only for head PSTH 04)

Article		
---------	--	--

PSTAK



ADJUSTABLE SPACER TABS 4 mm
polypropylene - Pack 80 pcs

Article	L x H mm	Pcs/pack
---------	----------	----------

PSTJ

Spacer tabs 80 mm long to be fixed on the self-levelling head, which allow the fixing of wooden, WPC and aluminium joists of max width 80 mm.



Items not for sale individually. Minimum order one pack.

FIXING CLIP FOR TILES - WIND-PROOF

Pack 40 pairs

Article	L x H mm	pairs/pack
---------	----------	------------

PSTWP

Fastening clip to fix the tiles and block the floor in case of strong wind. The clips must be inserted inside the cross joint or along the perimeter of the floor.



Items not for sale individually. Minimum order one pack.