

FIBRANgyps H2

Product

Gypsum based board (plasterboard) standard type H2, with additives to reduce the water absorption rate, CE marked according to the standard UNI EN 520 with one decorative green face .


Available in thickness : 12,5mm (BA13)

No emission of pollutants in the indoor environment – **classification A+ in accordance with EN ISO 16000-09.**



Applications

Suitable for installation with stud partitions, lining systems and ceilings that require superior moisture resistance.

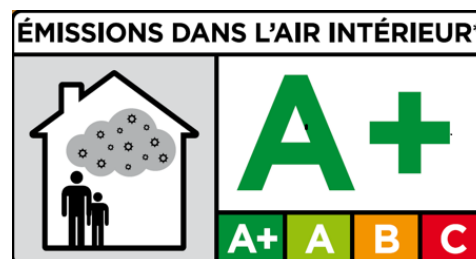

Features	U. M.	Value	Standard
Edge	-	BA tapered edge	EN 520
Width	mm	1200 or 1250	EN 520
Thermal conductivity (at 10°C)	W/m K	$\lambda_d = 0,25$ theoretical value	EN 10456
Reaction to fire	Class	A2-s1,d0	EN 520
Specific Heat Capacity	kJ/kg K	$c_p = 1,0$ theoretical value	EN 10456
Water vapor resistance factor	-	$\mu = 10$ in dry area theoretical value	EN 10456
Total water absorption	%	< 10	EN 520
Surface water absorption	g/m ²	≤ 220	EN 520

Type	Thickness [mm]	Weight [kg/m ²]	Length [m]	Flex. long. [N]	Flex. trasv. [N]
BA13	12,5	10	2,0 -2,5 -3,0	≥ 550	≥ 210



Marking on the board back:
 FIBRANgyps H2 – sp.....mm - CE – H2 - EN 520 A2-S1,d0(B) - date and time of production- D.o.P number.

FIBRAN reserves the right to alter or amend product specifications without notice. The information included in this document is correct to the best of our knowledge at the time of printing. Whilst FIBRAN will endeavor to ensure publications are up to date, it is the user's responsibility to check with the company the validity of the information prior to materials' use. For more information visit the website www.fibran.it or contact the Technical Department.
 07/02/2018 REV.1